


# FAST 250 PUMP PRO PLUS



Fog emission and saturation:  
up to 750 m<sup>3</sup> in 30 seconds  
(250 m<sup>3</sup> visibility less than 1 m)

A powerful and fast fogging system,  
ideal to protect small and medium  
areas like shops, homes, banks and  
generally all professional applications  
where a top security technology is  
needed.

It is arranged to an easy wall  
installation and it has a lower  
compartment to equip boards or  
accessories if needed.

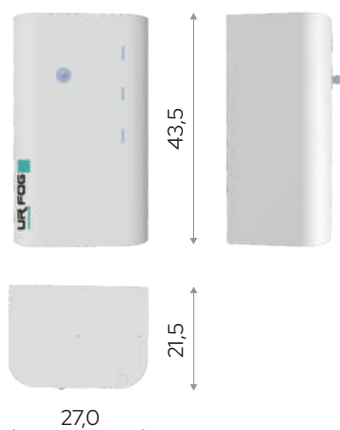

**UR FOG  
FOG  
STORM**

Fogging system with  
patented **PUMP** and "**LAYER**"  
heating **TECHNOLOGIES**

|                                                         |                             |
|---------------------------------------------------------|-----------------------------|
| Weight of the fogging machine                           | around 14 Kg                |
| Weight with packaging                                   | around 15 Kg                |
| Units on one pallet (100×120 cm)                        | 24                          |
| Dimension of the machine                                | L 27,0 x W 21,5 x H 43,5 cm |
| Dimension of the packaging                              | L 38,0 x W 26,0 x H 53,0 cm |
| Color                                                   | white                       |
| Working time without mains power                        | around 2 hours              |
| Heating time from cold                                  | around 50 minutes           |
| Vertical mounting                                       | yes                         |
| Horizontal mounting                                     | yes                         |
| Usb port for computer monitoring                        | yes                         |
| Nozzle tamper                                           | yes                         |
| Serial interface RS232<br>with UR FOG Standard protocol | yes                         |
| Lan Connection : Active Cloud                           | opzionale                   |

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Heating system "Layer"                                    | yes                      |
| Coverage in a single shot<br>(visibility more than 1,5 m) | up to 750 m <sup>3</sup> |
| Coverage in a single shot<br>(visibility less than 1 m)   | up to 250 m <sup>3</sup> |
| Max seconds<br>of fog emission                            | 30 sec                   |
| Max fog emitted<br>with full fog bag                      | 1700 m <sup>3</sup>      |
| Number of bag                                             | 1                        |
| Fog tank capacity                                         | 1 x 1000 ml              |
| Shooting specification                                    | programmable in seconds  |
| Bag included                                              | 1                        |

## ELECTRICAL SPECIFICATIONS

|                                         |                |
|-----------------------------------------|----------------|
| Mains power                             | 230 V or 120 V |
| Average power consumption               | 37 W           |
| 2 Ah 12V back up battery (not included) | yes            |
| Pir sensor validation input             | yes            |
| Shot confirmation output                | yes            |
| Power supply                            | yes            |

**FOG FLUID  
CERTIFIED**

